





































ProLite TH4265MIS-B1AG is a 42" Full HD, professional and fan-less LED-backlit display. Incorporating the InfraRed 20 point touch feature along with our supreme AMVA3 panel colour performance, this display offers the optimum performance for a truly multi-user interactive display experience. The Anti Glare coating is used in professional-grade displays to help avoid issues with reflections and external light sources affecting colour reproduction, contrast and sharpness. Besides, it features an ambient light sensor delivering exceptional performance with the added benefit of saving on power. Landscape and Portrait friendly, the display can be mounted according to the application for true impact in Interactive Digital Signage and with Protection Glass the display can handle harshest environments from the Classroom to Public Domain Retail installation.



AMVA3

AMVA3 technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



TOUCH TECHNOLOGY - INFRARED

The infrared technology uses infrared backlight. A touch event The littrated technology uses initiated backinght. A touch event is registered with great accuracy when the infrared light is blocked by finger or stylus. This technology does not rely on an overlay or substrate, so it is impossible to physically "wear out" the touchscreen. Moreover the display characteristics remain virtually unaffected by the touch functionality

| DIAGONAL | 42"; 106.7cm |
|------------------------------|--|
| ASPECT RATIO | 16:9 |
| PANEL | AMVA3 LED, AG coated glass |
| NATIVE RESOLUTION | Full HD 1080p, 1920 x 1080 (2.1 megapixel) |
| BRIGHTNESS | 400 cd/m² typical |
| BRIGHTNESS | 350 cd/m² with touch panel |
| CONTRAST | 3 000 : 1 typical |
| RESPONSE TIME | 6.5 ms |
| VIEWING ZONE | horizontal/vertical: 178°/ 178°; right/left: 89°/ 89°; up/down: 89°/ 89° |
| DISPLAY COLOUR | 16.7 million |
| TOUCH POINTS | 20 |
| GLASS THICKNESS | 3 mm |
| LIGHT TRANSMITTANCE | 88% |
| DISPLAY AREA H X W | 523.26 x 930.24 mm; 20.6" x 36.6" |
| PIXEL PITCH H X V | 0.4845 x 0.4845 mm |
| HORIZONTAL SYNC | 30 - 83 KHz |
| VERTICAL SYNC | 50 - 76 Hz |
| SYNCHRONIZATION | Separate Sync |
| MAX. NON-STOP OPERATING TIME | 18 hours/day |
| ANTI-GLARE COATING | yes |

2. INTERFACES & CONNECTORS

| HDCP | yes; |
|------------------|---|
| VIDEO IN | VGA, 3x HDMI, Comp. (RCA), AV |
| VIDEO OUT | HDMI, AV |
| AUDION IN | RCA (L/R), MiniJack |
| AUDIO OUT | RCA (L/R), speakers |
| CONTROLS | RS232C (IN/OUT), RJ45 (LAN), IR (IN/OUT) |
| USB MEDIA PLAYER | yes |
| INPUTS | 2x USB 2.0 (media playback / peripherals) |

3. FEATURES

| PLUG & PLAY | VESA DDC2B™ |
|-------------|---|
| CONTROLS | On-Screen-Display in 9 languages (EN, FR, NL, DE, PL, RU, CZ, IT, JP) controlled by back controls or a remote control |

| USER CONTROLS | picture (picture settings, advanced colour settings, base colour adjustment, adaptive contrast, ambient light sensor) sound (balance, advanced sound settings, HDMI audio, spectrum analyser) applications (media player, schedule, display wall) setting (language, network settings, control setting, set monitor ID, energy saving settings, aspect, VGA settings, freeze, blue screen, touch feature, anti image retention, OSD rotation, OSD info box, IR out, opening logo, information, all reset) |
|-------------------|---|
| SPEAKERS | 2 x 10 W (Stereo) |
| REGULATIONS | CE, TÜV-Bauart, CB, CU |
| VESA MOUNTING | 400 x 400 mm |
| COLOUR | Black |
| EXTERNAL CONTROLS | remote control |
| ORIENTATION | landscape / portrait |
| FANLESS DESIGN | yes |
| METAL BEZEL | yes |

4. ACCESSORIES

| INCLUDED ACCESSORIES | power cable, VGA signal cable, HDMI signal cable, remote control, battery, cable ties, iiyama logo |
|-----------------------|--|
| INGEODED AGGESSOTTIES | sticker, quick start guide, safety guide |

5. POWER MANAGEMENT

| POWER SUPPLY | AC 100 - 240 V, 50 / 60 Hz |
|-------------------|---|
| POWER SUPPLY UNIT | internal |
| POWER USAGE | 75 W typical; max. 0.5 W in Power management mode |
| POWER MANAGEMENT | VESA DPMS |


6. EU ENERGY EFFICIENCY LABEL

| ENERGY EFFICIENCY CLASS | В |
|---------------------------|----------------|
| ON MODE POWER CONSUMPTION | 75.3W |
| ANNUAL ENERGY CONSUMPTION | 110 kWh/annum* |
| PRESENCE OF LEAD | Yes |

7. DIMENSIONS & WEIGHT

| DIMENSIONS W X H X D | 987 x 578 x 74.5 mm |
|----------------------|---------------------|
| WEIGHT | 24.6 kg |

This is information under Regulation (EU) No 1062/2010.
*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

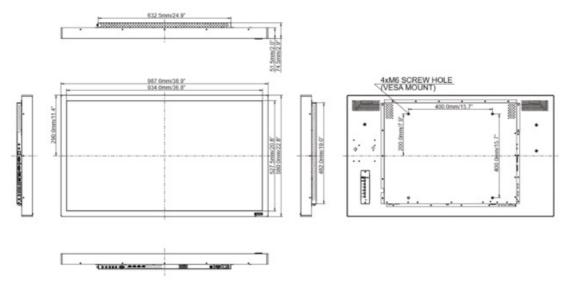

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION (). ALL RIGHTS RESERVED.