




Key Features

- Internal YUV4:4:4 processing
- 12 Bit processing
- HDMI 2.0 compatible
- HDCP 2.X compliance
- DisplayPort 1.2 Compatible
- Support for HDR
- 12G/6G/3G/HD/SD SDI input compatible
- 4K@60 outputs including HDMI 2.0, DisplayPort 1.2
- EDID management
- Up to 8K2K output splicing
- Multiple operation mode
- 90° and 270° rotation
- Support multiple cascade control


Application

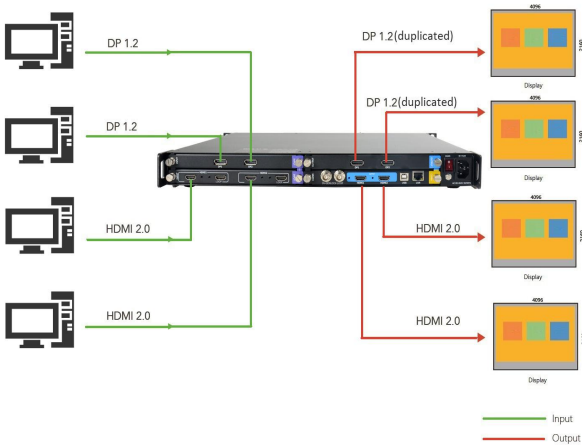

Order Codes

Product Code	Item
120-0004-01-0	D4
191-0004-01-0	Dual DP 1.2 Input Module
191-0004-02-0	Dual HDMI 2.0 Input Module
191-0004-03-0	3G SDI Input Module
191-0004-04-0	12G SDI Input Module
191-0004-21-1	Dual DP 1.2 Output Module

Dimensions

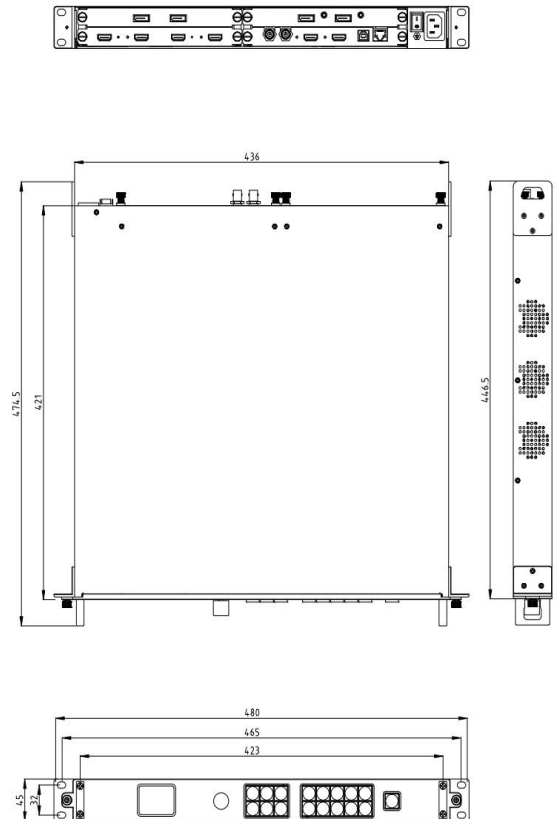

Specification

Connectors	Input	2 slots up to 4 inputs, select frc 4K HDMI Module 4 × HDMI-A (2 In 2 Loop) DP 1.2 Module 2 × DisplayPort 3G SDI Module 4 × BNC (2 In 2 Loop) 12G SDI Module 4 × BNC (2 In 2 Loop)
	Output	Standard with HDMI 2.0 2 × HDMI-A 1 slot up to 2 duplicated outputs Select from DP 1.2 Module 2 × DisplayPort
	Communication	Genlock 1 × RJ45 LAN 2 × BNC Serial USB In 1 × USB
	Power	1 x IEC
Performance	Input Resolutions	12G SDI SMPTE 480i 576i 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 DP 1.2 SMPTE 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 VESA 1920×1200@60 2560×1600@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60 HDMI 2.0 SMPTE 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×900@60 1600×1050@60 1600×1200@60 1680×1050@60 1920×1080@23.98/24/25/29.97/30/50/59.94/60 1920×1200@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60
	Output Resolutions	Select from below or configure customized DP 1.2 SMPTE 480i 576i 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 VESA 1920×1200@60 2560×1600@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60 HDMI 2.0 SMPTE 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/50/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×900@60 1600×1050@60 1600×1200@60 1680×1050@60 1920×1080@23.98/24/25/29.97/30/50/59.94/60 1920×1200@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@23.98/24/25/29.97/30/50/60 4096×2160@50/60
	Supported Standard	SDI SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI, MADI DisplayPort 1.2 HDMI 2.0
	Grey Level	12 bit
	Color Space	4:4:4
	Features	Splicing
Effects		Noise Reduction Deinterlace Sharpness Gamma
Audio		Supported for embedded audio
Invert/Mirror		Yes
EDID Management		Yes
Power	Input	AC 90-264VAC, 50/60Hz
	Max Power	100W
Environment	Temperature	0℃~40℃
	Humidity	10%~85%
Physical	Weight	Net 7.2kg Packaged 8.5kg
	Dimension	Net 480mm×474mm×45mm Packaged 530mm×530mm×130mm

