


CALL THE TEAM
01344 592 222

PL2.5 PRO

2.5MM INDOOR LED DISPLAY

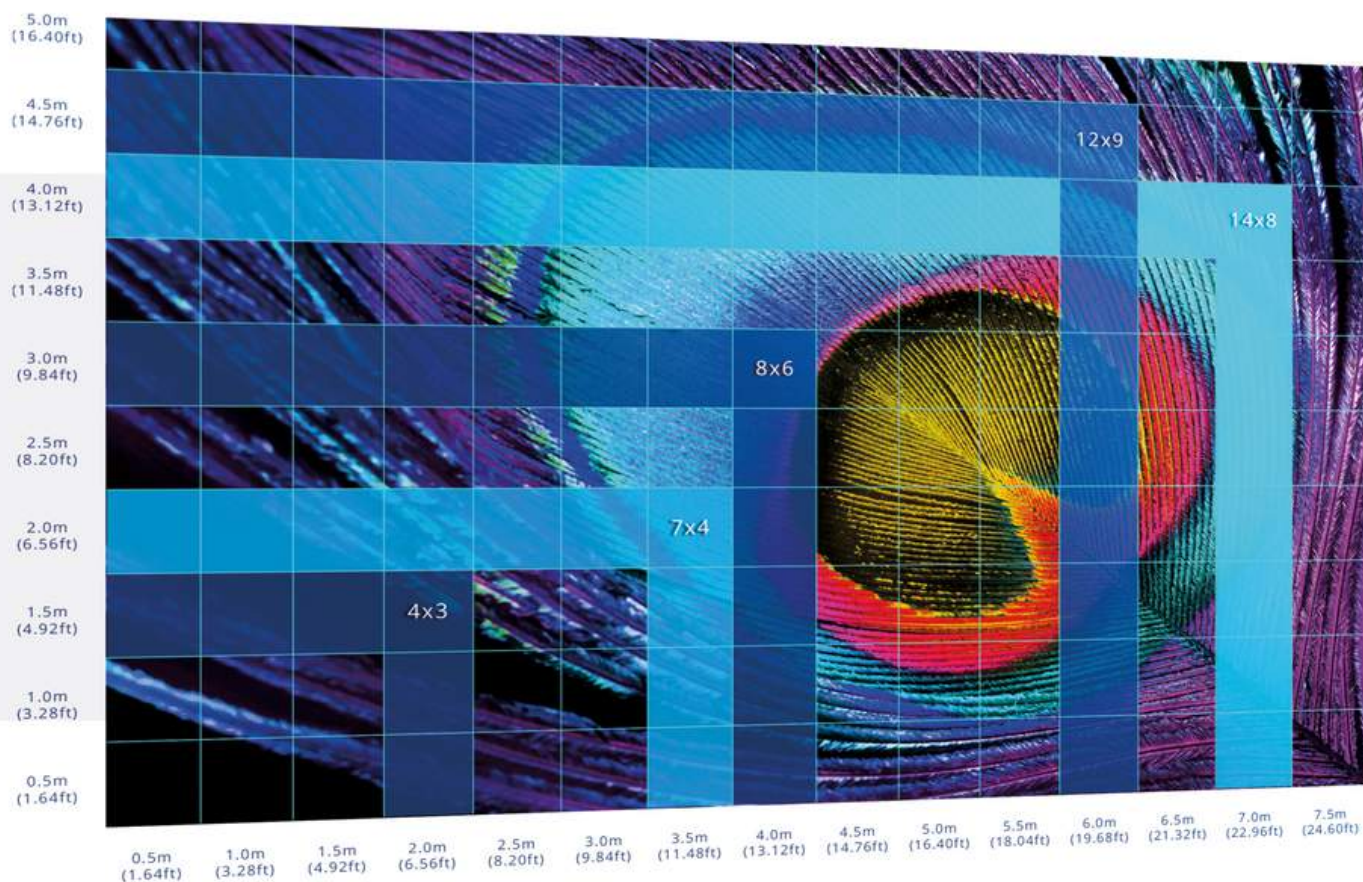

Pixel pitch	2.5
Brightness	1200 nits
Pixel configuration	1515 SMD Black
Contrast ratio	8000:01:00
Refresh rate	3840 Hz
Gray scale per colour	14 bit
Viewing angle (H/V)	140 / 120 deg.
Power consumption per sq.m. (max/avg)	540 / 180 w/sq.m
Input voltage (AC)	110-240 V
Panel size (WxHxD)	500 x 500 x 87 mm
Panel material	Die Casting Aluminium
Panel weight	9.4kg
Pixel matrix per panel	200 x 200
Operating temperature	-10--+40°C
Signal input format (with LED controller)	DVI, HDMI

CALL THE TEAM
01344 592 222

PL2.5 PRO

2.5MM INDOOR LED DISPLAY

PL2.5 PRO	Panel	Ratio	Panel Qty.	Size (m ²)	Dimension (W x H) m	Pixel Resolution	Total Weight (kg)	Average Power (W)
16:9	5x3	16:9.6	15	3.75	2.5 x 1.5	1000 x 600	141	675
	7x4	16:9.1	28	7	3.5 x 2	1400 x 800	263.2	1260
	9x5	16:8.9	45	11.25	4.5 x 2.5	1800 x 1000	423	2025
	10x6	16:9.6	60	15	5 x 3	2000 x 1200	564	2700
	11x6	16:8.7	66	16.5	5.5 x 3	2200 x 1200	620.4	2970
	12x7	16:9.3	84	21	6 x 3.5	2400 x 1400	789.6	3780
	14x8	16:0.1	112	28	7 x 4	2800 x 1600	1052.8	5040
	15x8	16:8.5	120	30	7.5 x 4	3000 x 1600	1128	5400
	15x9	16:9.6	135	33.75	7.5 x 4.5	3000 x 1800	1269	6075
4:3	4x3	4:3	12	3	2 x 1.5	800 x 600	112.8	540
	8x6	4:3	48	12	4 x 3	1600 x 1200	451.2	2160
	9x7	4:3.1	63	15.75	4.4 x 3.5	1800 x 1400	592.2	2835
	12x9	4:3	108	27	6 x 4.5	2400 x 1800	1015.2	4860